



600
6000

Vedação ZZ



Vedação 2RS





rolamento CILÍNDRICO
serviço LEVE
furo interno CILÍNDRICO
vedação Z ou 2RS

Rola- mento	Eixo Ød (mm)	Dimensão nominal (mm)					Cargas (Kgf)		Limite de Rotação (rpm)		Peso (Kg)
		ØD	Be	r	Ø da	Ø Da	dinâmica	estática	ZZ	2RS	
685	5	11	5	0,3	6,2	10,0	50	20	53000	45000	0,002
625	5	16	5	0,3	7,4	13,6	114	38	48000	28000	0,005
626	6	19	6	0,3	8,4	16,6	234	95	40000	24000	0,008
627	7	22	7	0,3	9,4	19,6	345	137	36000	22000	0,012
698	8	19	6	0,3	10,0	17,0	146	46,5	53000	24000	0,007
608	8	22	7	0,3	10,0	20,0	345	137	38000	22000	0,013
609	9	24	7	0,3	11,0	22,0	390	166	34000	19000	0,015
629	9	26	8	0,3	11,4	23,6	475	196	30000	19000	0,020
6000	10	26	8	0,3	12,0	24,0	475	196	29000	21000	0,019
6001	12	28	8	0,3	14,0	26,0	540	236	26000	18000	0,021
6002	15	32	9	0,3	17,0	30,0	585	285	22000	15000	0,030
6003	17	35	10	0,3	19,0	33,0	637	325	20000	14000	0,038
6004	20	42	12	0,6	23,2	38,8	995	500	18000	11000	0,067
6005	25	47	12	0,6	28,2	43,8	1190	655	15000	9400	0,078
6006	30	55	13	1,0	34,6	50,4	1380	830	13000	7700	0,120
6007	35	62	14	1,0	39,6	57,4	1680	1020	12000	6800	0,150
6008	40	68	15	1,0	44,6	63,4	1780	1100	10000	6100	0,190
6009	45	75	16	1,0	50,8	69,2	2210	1460	9200	5400	0,240
6010	50	80	16	1,0	54,6	75,4	2290	1600	8400	5000	0,260
6011	55	90	18	1,1	61,0	84,0	2960	2120	7700	4500	0,380
6012	60	95	18	1,1	66,0	89,0	3070	2320	7000	4100	0,410
6013	65	100	18	1,1	71,0	94,0	3190	2500	6500	3900	0,440
6014	70	110	20	1,1	76,0	104,0	3970	3100	6100	3600	0,610
6015	75	115	20	1,1	81,0	109,0	4160	3350	5700	3300	0,650
6016	80	125	22	1,1	86,0	119,0	4940	4000	5300	3100	0,860
6017	85	130	22	1,1	92,0	123,0	5200	4300	5000	2900	0,900
6018	90	140	24	1,5	97,0	133,0	6050	5000	4700	2800	1,160
6019	95	145	24	1,5	102,0	138,0	6370	5400	4500	2600	1,250
6020	100	150	24	1,5	107,0	143,0	6370	5400	4200	2600	1,260
6021	105	160	26	2,0	116,0	149,0	7610	6550	4000	2400	1,600
6022	110	170	28	2,0	119,0	161,0	8520	7350	3800	2300	1,970
6024	120	180	28	2,0	129,0	171,0	8840	8000	3500	2100	2,100

* vedações disponíveis: ZZ, 2RS

rolamento CILÍNDRICO
serviço NORMAL e MÉDIO
furo interno CILÍNDRICO
vedação Z ou 2RS

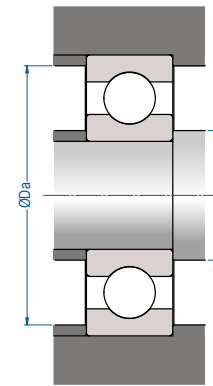

6200
6300

Rola- mento	Eixo Ød (mm)	Dimensão nominal (mm)					Cargas (Kgf)		Limite de Rotação (rpm)		Peso (Kg)
		ØD	Be	r	Ø da	Ø Da	dinâmica	estática	ZZ	2RS	
6200	10	30	9	0,6	14,2	25,8	540	236	25000	18000	0,032
6300	10	35	11	0,6	14,2	30,8	852	340	23000	16000	0,053
6201	12	32	10	0,6	16,2	27,8	728	310	22000	16000	0,037
6301	12	37	12	1,0	17,6	31,4	1010	415	20000	15000	0,060
6202	15	35	11	0,6	19,2	30,8	806	375	19000	15000	0,045
6302	15	42	13	1,0	20,6	36,4	1190	540	17000	12000	0,082
6203	17	40	12	0,6	21,2	35,8	995	475	18000	12000	0,065
6303	17	47	14	1,0	22,6	41,4	1430	655	16000	11000	0,110
6204	20	47	14	1,0	25,6	41,4	1350	655	16000	10000	0,110
6304	20	52	15	1,1	27,0	45,0	1680	780	17000	10000	0,140
6205	25	52	15	1,0	30,6	46,4	1480	780	13000	8900	0,130
6305	25	62	17	1,1	32,0	55,0	2340	1160	12000	8100	0,230
6206	30	62	16	1,0	35,6	56,4	2030	1120	11000	7300	0,200
6306	30	72	19	1,1	37,0	65,0	2960	1600	12000	6600	0,350
6207	35	72	17	1,1	42,0	65,0	2700	1530	9800	6300	0,290
6307	35	80	21	1,5	44,0	71,0	3510	1900	8800	6000	0,460
6208	40	80	18	1,1	47,0	73,0	3250	1900	8700	5600	0,370
6308	40	90	23	1,5	49,0	81,0	4230	2400	7800	5300	0,630
6209	45	85	19	1,1	52,0	78,0	3510	2160	7800	5200	0,420
6309	45	100	25	1,5	54,0	91,0	5530	3150	7000	4700	0,840
6210	50	90	20	1,1	57,0	83,0	3710	2320	7100	4700	0,460
6310	50	110	27	2,0	61,0	99,0	6500	3800	6400	4200	1,080
6211	55	100	21	1,5	64,0	91,0	4620	2900	6400	4300	0,610
6311	55	120	29	2,0	66,0	109,0	7410	4500	5800	3900	1,370
6212	60	110	22	1,5	69,0	101,0	5530	3600	6000	3800	0,780
6312	60	130	31	2,1	72,0	118,0	8520	5200	5400	3600	1,720
6213	65	120	23	1,5	74,0	111,0	5850	4050	5500	3600	1,020
6313	65	140	33	2,1	77,0	128,0	9750	6000	4900	3300	2,110
6214	70	125	24	1,5	79,0	116,0	6370	4500	5100	3400	1,090
6314	70	150	35	2,1	82,0	138,0	11100	6800	4600	3100	2,550
6215	75	130	25	1,5	84,0	121,0	6890	4900	4800	3200	1,190
6315	75	160	37	2,1	87,0	148,0	11900	7650	4300	2900	3,060
6216	80	140	26	2,0	91,0	129,0	7280	5500	4500	3000	1,400
6316	80	170	39	2,1	92,0	158,0	13000	8650	4000	2700	3,630
6217	85	150	28	2,0	96,0	139,0	8710	6400	4200	2800	1,800
6317	85	180	41	3,0	99,0	166,0	14000	9650	3800	2600	4,250
6218	90	160	30	2,0	101,0	149,0	10100	7350	4000	2600	2,220
6318	90	190	43	3,0	104,0	176,0	15100	10800	3600	2400	4,970
6219	95	170	32	2,1	107,0	158,0	11400	8150	3700	2500	2,630
6319	95	200	45	3,0	109,0	186,0	15900	11800	3300	2300	5,750
6220	100	180	34	2,1	112,0	168,0	12700	9300	3500	2300	3,150
6320	100	215	47	3,0	114,0	201,0	17400	14000	3200	2200	7,200
6322	110	240	50	3,0	124,0	226,0	20300	18000	2900	1900	9,660

* vedações disponíveis: ZZ, 2RS