



SSB 200

AÇO INOXIDÁVEL

rolamento ESFÉRICO

fixação por PARAFUSOS

serviço LEVE

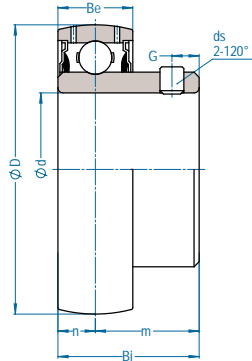

Rolamento	Eixo		Dimensão nominal (mm)						ds (mm) (UNF)	Cargas (kg)		Peso (kg)
	Ø pol	Ø mm	D	Bi	n	m	Be	G		C _r dinâmica	C _{or} estática	
SSB 202 V22		3/4	40,0	22,0	6,0	16,0	12,0	4,5	M5x0,8	970	490	0,10
SSB 204-12 V22 SSB 204 V22	3/4	20	47,0	24,7	7,0	18,0	14,0	4,5	M6x0,75 1/4-28	1310	680	0,15
SSB 205 V22		25	52,0	27,0	7,5	19,5	15,0	5,0	M6x0,75	1430	800	0,20
SSB 206 V22		30	62,0	30,0	8,0	22,0	16,0	5,5	M6x0,75	2000	1140	0,20
SSB 207 V22		35	72,0	34,9	8,5	23,5	19,0	6,0	M8x1	2640	1550	0,40