



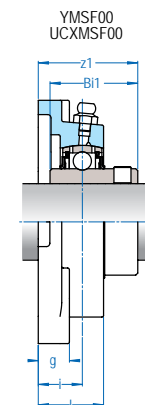

MSF 00

mancal tipo FLANGE
serviço MÉDIO



Caixa	Eixo		Dimensão nominal (mm)						Paraf.	Peso (kg) YMSF00 UCXMSF00	D	Rolamentos Y200 / UCX 00 ⁽¹⁾	
	Ø pol	Ø mm	a	e	i	g	l	s				z1	Bi1
MSF 25	1	25	108	82,5	20,0	16	33	12,0	M10 3/8	1,11	62,0	42,2	38,1
MSF 30	1-3/16 1-1/4	30	118	92,0	20,0	14	33	13,5	M12 1/2	1,50	72,0	45,4	42,9
MSF 35	1-3/8 1-7/16	35	130	101,5	23,0	15	37,5	13,5	M12 1/2	1,90	80,0	53,2	49,2
MSF 40	1-1/2	40	137	105,0	23,0	16	37	17,0	M16 5/8	2,20	85,0	53,2	49,2
MSF 45	1-3/4 1-11/16	45	143	111,0	25,9	18	39	17,0	M16 5/8	2,40	90,0	58,5	51,6
MSF 50	1-7/8 1-15/16 2	50	162	130,0	28,9	21,5	43	17,0	M16 5/8	3,40	100,0	62,3	55,6
MSF 55	2-3/16 2-1/4	55	175	143,0	28,5	18	48	17,0	M16 5/8	4,00	110,0	68,2	65,1
MSF 60 MSF 65	2-7/16 2-1/2	60 65	187	149,2	33,5	18,5	49	17,0	M16 5/8	5,80	125,0	77,9	74,6
MSF 70	2-11/16 2-3/4	65 70	197	152,4	36,6	23,5	56,5	21,0	M20 3/4	7,30	130,0	81,1	77,8
MSF 75	2-15/16 3	75	197	152,4	39,7	23,5	56,5	21,0	M20 3/4	7,90	140,0	89,0	77,8
MSF 80	3-3/16 3-1/4	80	214	171,5	38,2	26,5	56,5	21,0	M20 3/4	9,40	150,0	89,8	85,7
MSF 85 MSF 90	3-7/16 3-1/2	85 90	214	171,5	44,6	26,5	63	21,0	M20 3/4	11,20	160,0	100,9	96,0
MSF 95 MSF 100	3-15/16	95 100	268	211,1	65,1	32,5	90,5	26,0	M24 1	21,00	200,0	127,1	103,0

(1) - para escolha do eixo considerar o diâmetro externo da série (D)