



G 300

rolamento ESFÉRICO
fixação por COLAR EXCÊNTRICO
serviço PESADO

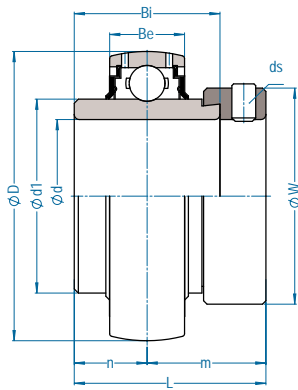

Rolamento	Eixo		Dimensão nominal (mm)								ds (mm) (UNF)	Cargas (kgf)		Peso (kg)
	Ø pol	Ø mm	D	d1	Bi	L	n	m	Be	W		dinâmica C _r	estática C _{or}	
G 306 V22 G 306-19 V22	1-3/16	30	72,0	44,5	36,5	50,0	17,5	32,5	24,0	50,0	M8x1 5/16-24	2760	1550	0,65
G 307-20 V22 G 307 V22 G 307-23 V22		35	80,0	49,0	38,1	51,6	18,3	33,3	25,0	55,0	M8x1 5/16-24	3420	1960	0,80
G 308-24 V22 G 308 V22	1-1/2	40	90,0	56,5	41,3	57,1	19,8	37,3	28,0	63,5	M10x1,25 3/8-24	4140	2450	1,10
G 309-27 V22 G 309 V22	1-11/16	45	100,0	62,0	42,9	58,7	19,8	38,9	30,0	70,0	M10x1,25 3/8-24	5410	3250	1,50
G 310-31 V22 G 310 V22		50	110,0	69,0	49,2	66,6	24,6	42,0	32,0	76,2	M10x1,25 3/8-24	6300	3860	1,85
G 311-32 V22 G 311 V22 G 311-35 V22	2-3/16	55	120,0	75,0	55,6	73,0	27,8	45,2	34,0	83,0	M10x1,25 3/8-24	7300	4570	2,35
G 312-36 V22 G 312-37 V22 G 312 V22 G 312-39 V22 G 312-650 V22		60 65	130,0 130,0	81,0 81,0	61,9 61,9	79,4 79,4	30,9 30,9	48,5 48,5	36,0 36,0	89,0 89,0	M10x1,25 3/8-24	8330 8330	5290 5290	2,90 2,90
G 314-43 V22 G 314 V22	2-11/16	70	150,0	94,0	68,3	92,1	34,1	58,0	40,0	102,0	M12x1,25 7/16-20	10640	6940	4,50
G 315-47 V22	2-15/16		160,0	100,5	74,6	100,0	37,3	62,7	42,0	113,0	5/8-18	11570	7840	5,60
G 316 V22 G 316-51 V22	3-3/16	80	170,0	108,0	81,0	106,4	40,5	65,9	44,0	119,0	M16x1,5 5/8-18	12540	8830	6,70
G 318-55 V22 G 318 V22		90	190,0	120,0	87,3	115,9	43,6	72,3	48,0	133,0	M20x1,5 3/4-16	14590	11020	9,85
G 318-56S V22 G 318-S V22	3-1/2	90	190,0	120,0	77,5	101,0	35,5	65,5	48,0	133,0	M20x1,5 3/4-16	17510	14290	8,10
G 320 V22 G 320-63 V22	3-15/16	100	215,0	134,5	100,0	128,6	50,0	78,6	54,0	146,0	M20x1,5 3/4-16	17510	14290	13,00
G 320S V22		100	215,0	134,5	86,0	109,5	39,5	70,0	49,0	145,0	M10x1,25	17510	14290	10,80