

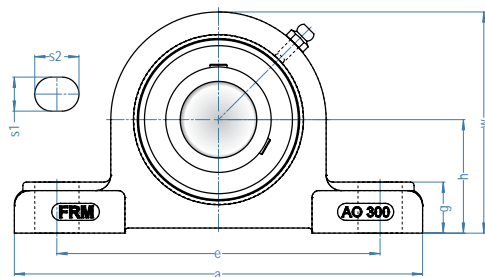


AO 300

mancal tipo APOIO
serviço PESADO



Caixa	Eixo		Dimensão nominal (mm)								Paraf.	Peso (kg)		D	Rolamentos			
	Ø pol	Ø mm	h	a	e	b	s1	s2	g	w		YAO3	GAO3		Y 300	G 300		
														BI1	m1	BI2	m2	
AO 306	1-3/16	30	47,6	173	136	49	17	20	23	96	M14 1/2	1,80	1,90	72,0	43,0	26,0	50,0	32,5
AO 307	1-1/4 1-7/16	35	54,0	192	152	54	17	20	25	104	M14 1/2	2,50	2,50	80,0	48,0	29,0	51,6	33,3
AO 308	1-1/2	40	60,3	216	171	61	20	26	27	118	M16 5/8	3,50	3,60	90,0	52,0	33,0	57,1	37,3
AO 309	1-11/16 1-3/4	45	66,7	240	190	67	20	26	30	130	M16 5/8	4,60	4,80	100,0	57,0	35,0	58,7	38,9
AO 310	1-7/8 1-15/16	50	71,4	265	209	75	20	26	33	142	M16 5/8	6,50	6,70	110,0	61,0	39,0	66,6	42,0
AO 311	2 2-3/16	55	77,8	287	228	80	23	29	38	153	M20 3/4	7,80	8,20	120,0	66,0	41,0	73,0	45,2
AO 312	2-1/4 2-5/16 2-7/16	60 65	84,1	312	247	84	23	29	40	166	M20 3/4	10,00	10,30	130,0	71,0	45,0	79,4	48,5
AO 314	2-11/16	70	96,8	360	286	96	26	34	46	192	M22 7/8	15,30	15,90	150,0	78,0	47,0	92,1	58,0
AO 315	2-15/16 3	75	104,8	384	305	103	26	34	49	205	M22 7/8	18,30	19,30	160,0	82,0	50,0	100,0	62,7