



Furos para relubrificação

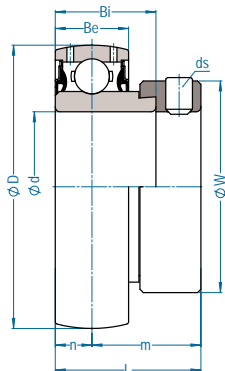

SSGRA 200

AÇO INOXIDÁVEL
 rolamento ESFÉRICO
 fixação por COLAR EXCÊNTRICO
 serviço LEVE



Rolamento	Eixo Ø mm	Dimensão nominal (mm)							ds (mm) (UNF)	Cargas (kgf)		Peso (kg)
		D	L	Bi	Be	n	m	W		dinâmica C _r	estática C _{or}	
SSGRA 205 V22	25	52,0	31,0	21,4	15,0	7,5	23,5	38,1	M6x1,0	1430	800	0,20
SSGRA 206 V22	30	62,0	35,7	23,8	16,0	8,0	26,7	44,5	M6x1,0	2000	1140	0,30
SSGRA 207 V22	35	72,0	38,9	25,4	17,0	8,5	29,4	55,6	M8x1,0	2640	1550	0,55
SSGRA 208 V22	40	80,0	43,7	30,2	19,0	9,5	32,7	60,3	M8x1,0	2990	1860	0,60
SSGRA 209 V22	45	85,0	43,7	30,2	19,0	9,5	32,7	63,5	M8x1,0	3350	2120	0,60
SSGRA 210 V22	50	90,0	43,7	30,2	20,0	10,0	32,7	69,9	M8x1,0	3600	2370	0,60
SSGRA 211 V22	55	100,0	48,4	32,5	21,0	10,5	36,4	76,2	M10x1,25	4400	2980	0,65
SSGRA 212 V22	60	110,0	53,1	37,1	22,0	11,0	41,2	84,2	M10x1,25	5350	3350	0,65